



3415

FLEXIBLE NEOPRENE GAUNTLET WITH A ROUGH-TEXTURED FINISH

The pinnacle of protection, comfort and dexterity. The SHOWA 3415 creates a defensive barrier against a range of chemicals, including acids, caustics, solvents, grease and oil.

FEATURES

- › Fully coated neoprene gauntlet
- › Flexible neoprene coating provides great comfort and dexterity
- › Rough textured finish offers enhanced grip and good resistance to abrasion
- › Level 3 abrasion resistance (EN388: 2016)
- › Protects against a wide variety of chemicals including acids, caustics, solvents, grease and oil
- › 15 gauge seamless polyester liner helps to prevent irritation
- › Length: 35.5cm



SUITABLE FOR


Typical Industries

- Automotive
- Chemical
- Offshore
- Oil and Gas
- Petrochemicals
- Transport

Suitable Applications

- Chemical Handling
- Handling Oily Components
- Refining

CERTIFICATION



See overleaf for explanation





3415

PRODUCT INFORMATION

MATERIALS	LINER:	Polyester
	COATING:	Neoprene
COLOUR	Black	
LENGTH (mm)	355	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/S	SHO34151	12 pairs per bag 72 pairs per case
9/M	SHO34152	
10/L	SHO34153	
11/XL	SHO34154	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

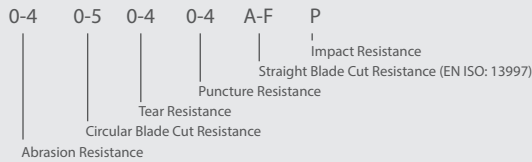

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide	C	≥10 min for at least 1 chemical
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-3415_0620_1