

INSULATED GAUNTLET WITH A FIXED ACRYLIC LINER AND FULL PVC COATING

A flexible, soft and fully coated gauntlet that seals and protects the hand against chemicals and in cold environments.

FEATURES

- › Remains flexible down to -20°C
- › Impermeable for working in damp or greasy environments
- › Rough surface provides tactile feel and better grip
- › Fixed seamless acrylic liner
- › Effective cold protection
- › Designed for easy movement and continuous wear
- › Extended protection on the forearm
- › Thickness: 1.10mm



SUITABLE FOR

Typical Industries

- Agriculture
- Chemical
- Construction
- Logistics
- Maritime
- Transport

Suitable Applications

- Chemical Processing
- Cold Weather Work
- Degreasing
- Maintenance
- Tank Filling

CERTIFICATION

CAT III	EN 388:2016	EN ISO 374-1:2016/Type C	EN ISO 374-5:2016	EN 511:2006
0120	3221X	KL		121

See overleaf for explanation

PRODUCT INFORMATION

MATERIALS	LINER:	Cotton, acrylic
	COATING:	PVC
COLOUR	Orange	
LENGTH (mm)	300	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SHO4602	10 pairs per bag 60 pairs per case
9/L	SHO4603	
10/XL	SHO4604	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove with cold protection. Not suitable for thermal (heat), electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

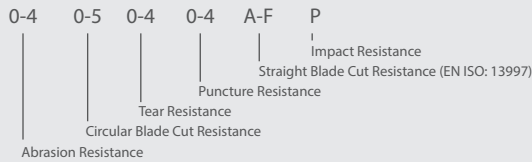

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



COLD HAZARDS EN 511



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

