

## DOUBLE DIPPED, MEDIUM WEIGHT PVC GAUNTLET

Strong yet extremely soft and flexible, SHOWA 620 is a durable, double-dipped medium weight PVC glove that ensures grip and provides liquid-proof protection. The first working glove for which SHOWA obtained a seamless processing patent in 1980

### FEATURES

- › Fully coated and chemical resistant with an extra coating of PVC over the hand
- › Double-dipped medium weight PVC coated
- › Good resistance to acids, alkalis and vegetable/animal oils
- › Scalloped edge
- › Designed for easy movement and continuous wear
- › Seamless cotton liner
- › Rough textured finish enhances grip



### SUITABLE FOR



#### Typical Industries

- Agriculture
- Chemical
- Construction
- Offshore
- Oil and Gas
- Public Utilities

#### Suitable Applications

- Commercial Fishing
- Chemical Handling
- Cleaning
- Fuel Transport
- Maintenance

### CERTIFICATION



See overleaf for explanation



# 620

## PRODUCT INFORMATION

<b>MATERIALS</b>	LINER:	Cotton
	COATING:	PVC
<b>COLOUR</b>	Orange	
<b>LENGTH (mm)</b>	300 (size dependent)	
<b>CUFF STYLE</b>	Gauntlet	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SHO6202	10 pairs per bag 120 pairs per case
9/L	SHO6203	
10/XL	SHO6204	
11/XXL	SHO6205	


## RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

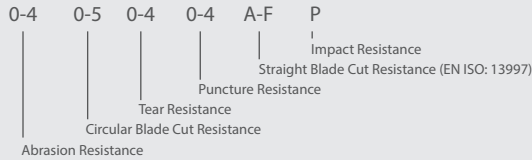

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofurane	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-620\_0620\_1