

## SINGLE USE GLOVE, 100% NITRILE, POWDER FREE, SILICONE FREE, 240MM LONG, 0.10MM THICK

Single-use nitrile glove with high performance against penetration and projection of chemicals. Low modulus formulation to improve fit and reduce fatigue.

### FEATURES

- › Single-use 100% nitrile disposable glove
- › Powder-free and approved for food-handling
- › Second skin feel, softer texture and easy donning
- › Latex-free to avoid type I and type IV latex allergies
- › Chlorinated to offer more comfort, grip and reduce tackiness
- › Textured finish on fingertips to enhance grip
- › Low-modulus formulation to improve fit and reduce fatigue
- › Dual labelling: PPE and medical
- › Category III, EN374 and EN455 approved
- › Antistatic properties due to inherent antistatic properties of nitrile
- › Resistant against viruses according to ASTM F 1671:2007
- › Force at break: 10N
- › Length: 240mm
- › Thickness: 0.10mm
- › AQL 0.65



### SUITABLE FOR


#### Typical Industries

- Aerospace
- Electronics
- Food
- Laboratory
- Medical
- Pharmaceutical
- Printing

#### Suitable Applications

- Chemical Handling
- Emergency Services
- Food Handling
- Glass
- Handling Oily Components
- Light Assembly

### CERTIFICATION

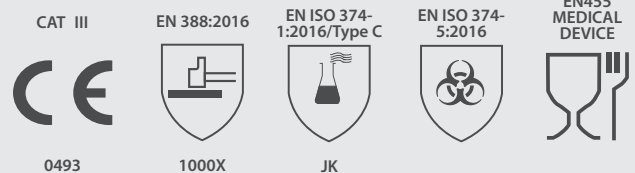

See overleaf for explanation

## PRODUCT INFORMATION

|                    |                      |
|--------------------|----------------------|
| <b>MATERIALS</b>   | Nitrile              |
| <b>COLOUR</b>      | Cobalt blue          |
| <b>LENGTH (mm)</b> | 250 (size dependent) |
| <b>CUFF STYLE</b>  | Beaded               |

## ORDERING DETAILS

| SIZE | CODE     | PACKAGING                                |
|------|----------|--|
| XS   | SHO75400 | 100 singles per box<br>20 boxes per case |
| S    | SHO75401 |  |
| M    | SHO75402 |  |
| L    | SHO75403 |  |
| XL   | SHO75404 |  |
| XXL  | SHO75405 |  |


## RECOMMENDATIONS FOR USE

- **USE:** Single use glove. Not suitable for thermal, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

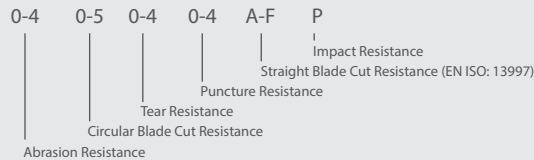

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



FOOD CONTACT DIRECTIVE EC 10/2011



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

| CODE | CHEMICAL         | CODE | CHEMICAL               | TYPE OF GLOVES | BREAKTHROUGH TIME                |
|------|------------------|------|------------------------|----------------|----------------------------------|
| A    | Methanol         | J    | n-Heptane              | A              | ≥30 min for at least 6 chemicals |
| B    | Acetone          | K    | Sodium hydroxide 40%   |                |                                  |
| C    | Acetonitrile     | L    | Sulphuric acid 96%     | B              | ≥30 min for at least 3 chemicals |
| D    | Dichloromethane  | M    | 65% Nitric acid        |                |                                  |
| E    | Carbon Disulfide | N    | 99% Acetic acid        | C              | ≥10 min for at least 1 chemical  |
| F    | Toluene          | O    | 25% Ammonium hydroxide |                |                                  |
| G    | Diethylamine     | P    | 30% Hydrogen peroxide  |                |                                  |
| H    | Tetrahydrofuran  | S    | 40% Hydrofluoric acid  |                |                                  |
| I    | Ethyl acetate    | T    | 37% Formaldehyde       |                |                                  |

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

