

## SINGLE USE GLOVE, 100% NITRILE, POWDER FREE, SILICONE FREE, 300MM LONG, 0.20MM THICK

Single-use nitrile glove with high performance against penetration and projection of chemicals. Low modulus formulation to improve fit and reduce fatigue.

### FEATURES

- › Single-use 100% nitrile disposable glove
- › Powder-free and approved for food-handling
- › Second skin feel, softer texture and easy donning
- › Latex-free to avoid type I and type IV latex allergies
- › Chlorinated to offer more comfort, grip and reduce tackiness
- › Textured finish on fingertips to enhance grip
- › Low-modulus formulation to improve fit and reduce fatigue
- › Dual labelling: PPE and medical
- › Category III, EN374 and EN455 approved
- › Antistatic properties due to inherent antistatic properties of nitrile
- › Resistant against viruses according to ASTM F 1671:2007
- › Force at break: 20N
- › Length: 300mm
- › Thickness: 0.20mm
- › AQL 0.65



### SUITABLE FOR

#### Typical Industries

- Aerospace
- Electronics
- Food
- Laboratory
- Medical
- Pharmaceutical
- Printing

#### Suitable Applications

- Chemical Handling
- Emergency Services
- Food Handling
- Glass
- Handling Oily Components
- Light Assembly

### CERTIFICATION

CAT III	EN 388:2016	EN ISO 374-1:2016/Type B	EN ISO 374-5:2016	EN455 MEDICAL DEVICE
0493	2001X	JKL		

See overleaf for explanation

## PRODUCT INFORMATION

<b>MATERIALS</b>	Nitrile
<b>COLOUR</b>	Cobalt blue
<b>LENGTH (mm)</b>	300 (size dependent)
<b>CUFF STYLE</b>	Beaded

## ORDERING DETAILS

SIZE	CODE	PACKAGING
S	SHO75851	50 singles per box 20 boxes per case
M	SHO75852	
L	SHO75853	
XL	SHO75854	
XXL	SHO75855	


## RECOMMENDATIONS FOR USE

- **USE:** Single use glove. Not suitable for thermal, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

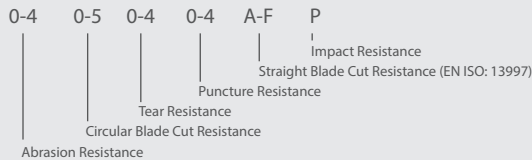

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



FOOD CONTACT DIRECTIVE EC 10/2011



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide	C	≥10 min for at least 1 chemical
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofurane	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

