

SKYTEC® | TORQ RED F™

DURABLE IMPACT PROTECTION WITH CUT RESISTANCE

A flexible and extreme handling impact resistant glove with a tough palm material offering outstanding grip in all conditions. Provides high cut protection allowing heavy duty works to be carried out safely.

FEATURES

- › Cut resistant: Level F (EN 388:2016), ANSI A7
- › A robust single-piece ARMORTEX® material palm for heightened durability and anti-slip grip
- › Durable multi-layer fabric on the palm provides high cut and abrasion resistance
- › Continuous impact panel for full coverage protection
- › Contact Heat Resistant up to 250°C/482°F
- › Neoprene cuff resists snagging and offers a comfortable and secure fit around the wrist
- › Double-stitched Kevlar® thread to bolster high wear areas
- › Anatomically curved finger design helps prevent hand fatigue
- › Pull tab with ID tag



SUITABLE FOR


Typical Industries

- Construction
- Metal Fabrication
- Mining
- Oil and Gas
- Transportation

Suitable Applications

- Assembly
- Cargo handling
- Demolition
- Drilling
- Heavy construction
- Mining extraction

CERTIFICATION

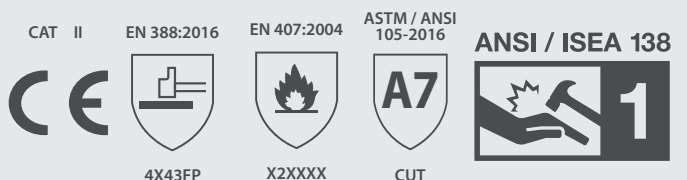

See overleaf for explanation

MATERIALS		
MATERIALS	DORSAL:	Foam laminated polyester spandex fabric with moulded TPR protection
	PALM:	Synthetic leather with red ARMORTEX® abrasion resistant fabric and knitted cut resistant fabric
COLOUR	Yellow/Black/Red	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Loose neoprene cuff	

- ### RECOMMENDATIONS FOR USE
- **USE:** General handling glove with cut and impact protection. Not suitable for high thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement.
 - **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight.
 - **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
 - **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of the user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SKG00020CF	10 pairs per bag
9/L	SKG00020CH	
10/XL	SKG00020CJ	
11/XXL	SKG00020CL	60 pairs per case
12/XXXL	SKG00020CN	
13/XXXXL	SKG00020CP	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance	Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Straight Blade Cut Resistance (EN ISO: 13997)	Impact Resistance

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

HEAT AND FIRE EN 407 PERFORMANCE LEVELS

0-4	0-4	0-4	0-4	0-4	0-4
Contact Heat Resistance	Convective Heat Resistance	Radiant Heat Resistance	Resistance to Small Drops Of Molten Metal	Resistance to Large Splashes of Molten Metal	Burning Behaviour

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



EU compliance certificate delivered by the notified body INTERTEK ITALIA SPA, Via Guido Miglioli, 2/A - 20063 Cernusco sul Naviglio (MI) - Italia (Notified body 2575)
 The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.